

Ultra-Thin head
to support lighter & smaller design



LAMIX™

<Current material/method/structure >

Conventional Pan head

● Need to reserve a space on the work for head.

- Projection on work
- Hang up to head
- Need to form countersunk or put a cover on work to mask screw head.
- Difficult to reduce weight of work.

<New material/method/structure etc.>

● Resolve uncomfortable feeling of appearance and touch.

● Assist your products to be lighter and smaller.

● Bigger head diameter
bigger Contact area on bearing surface)

- Prevents screw failure
- Effects loose-proof
- Prevents head sinking.


Two choices of head height are available;

LAMIX H2 = t0.2mm

LAMIX H5 = t0.5mm

Compare to conventional Pan head screw, LAMIX is **77% thinner, & 49% lighter**

Reinforcement under head to secure strength

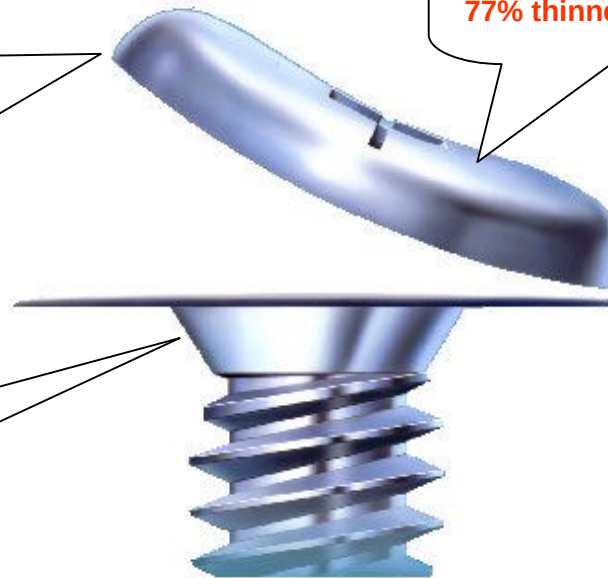

Technical point

Bigger contact area of bearing surface and reinforce under the head effect to raise tightening torque.

As it makes easy to control torque control, workability will be improved especially in fastening by power tool.

NITTO SEIKO CO., LTD.


20, Umegahata,
Inokura, Ayabe,
Kyoto 623-0054, Japan

Tel : 81-773-43-0290
Fax : 81-773-43-5571
E-mail : sales@nittoseiko.com
URL : <http://www.nittoseiko.co.jp/>

【Trademarks which attached "®" are registered trademark in Japan and/or other countries.】

LAMIX™ H2

Dimension table

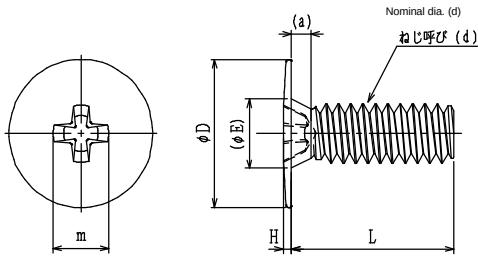


Head configuration shall be same for both of Machine screw & TAP-TITE®*.

Only for M2 screw, H shall be 0.3mm.

Nominal dia.(d)	D	H	M	Reinforcement		Nitto Seiko Dwg. No.		
	Basic dim. & tolerance	Basic dim. & tolerance	Ref.	(f E)	(a)	Machine screw	B-TITE®	PS-TITE®
M1.4	2.5 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.2 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.35	(1.65)	(0.47)	S018220	A005800	S018395
	3.0 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.2 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.35	(1.65)	(0.47)	S018221	A005801	S018396
	3.5 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.2 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.35	(1.65)	(0.47)	S018222	A005802	S018397
M1.6	3.0 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.2 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.55	(1.90)	(0.50)	S018223	A005803	S018398
	3.5 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.2 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.55	(1.90)	(0.50)	S018224	A005804	S018399
	4.0 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.2 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.55	(1.90)	(0.50)	S018225	A005805	S018400
M1.7	3.0 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.2 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.55	(2.00)	(0.50)	S018226	A005806	S018401
	3.5 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.2 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.55	(2.00)	(0.50)	S018227	A005807	S018402
	4.0 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.2 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.55	(2.00)	(0.50)	S018228	A005808	S018403
M2.0	3.5 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.3 $\begin{smallmatrix} +0.05 \\ (0.2) -0.05 \end{smallmatrix}$	1.65	(2.20)	(0.50)	S018770 (S018229)	A005900 (A005809)	S018773 (S018404)
	4.0 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.3 $\begin{smallmatrix} +0.05 \\ (0.2) -0.05 \end{smallmatrix}$	1.65	(2.20)	(0.50)	S018771 (S018230)	A005901 (A005810)	S018774 (S018405)
	4.5 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.3 $\begin{smallmatrix} +0.05 \\ (0.2) -0.05 \end{smallmatrix}$	1.65	(2.20)	(0.50)	S018772 (S018231)	A005902 (A005811)	S018775 (S018406)

LAMIX™ H5

Dimension table

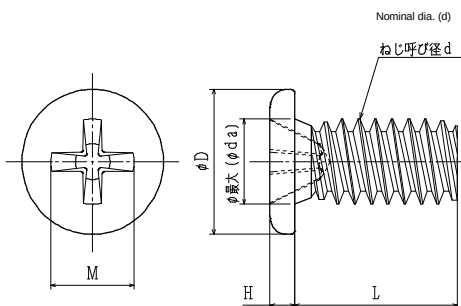

Head configuration shall be same for both of Machine screw & TAP-TITE®*.

Only for M3 screw, H shall be 0.6mm.

Nominal dia.(d)	D	H	M	d a	Nitto Seiko Dwg. No.		
	Basic dim. & tolerance	Basic dim. & tolerance	Ref.		Machine screw	B-TITE®	PS-TITE®
M1.4	3.0 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.5 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.55	1.8	S018232	A005812	S018407
	3.5 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.5 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.55	1.8	S018233	A005813	S018408
	4.0 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.5 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.55	1.8	S018234	A005814	S018409
M1.6	3.5 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.5 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.65	2.0	S018235	A005815	S018410
	4.0 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.5 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.65	2.0	S018236	A005816	S018411
	4.5 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.5 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.65	2.0	S018237	A005817	S018412
M1.7	3.5 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.5 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.70	2.1	S018238	A005818	S018413
	4.0 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.5 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.70	2.1	S018239	A005819	S018414
	4.5 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.5 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	1.70	2.1	S018240	A005820	S018415
M2.0	4.0 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.6 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	2.00	2.6	S018241	A005821	S018416
	4.5 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.6 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	2.00	2.6	S018242	A005822	S018417
	5.0 $\begin{smallmatrix} +0.05 \\ -0.20 \end{smallmatrix}$	0.6 $\begin{smallmatrix} +0.05 \\ -0.05 \end{smallmatrix}$	2.00	2.6	S018243	A005823	S018418

NITTO SEIKO CO.,LTD.

*TAP TITE® is registered trade mark of REMINC.